010 DRAWING SHOWS LOCATION OF FREIGHTLINER CP3 CHASSIS COMPONENTS WITH PASSENGER SIDE FUEL TANK




LOCATION OF REMOTE ENGINE CONN.



LOCATION OF EXHAUST



LOCATION OF AIR DRYER (IF REQD.)

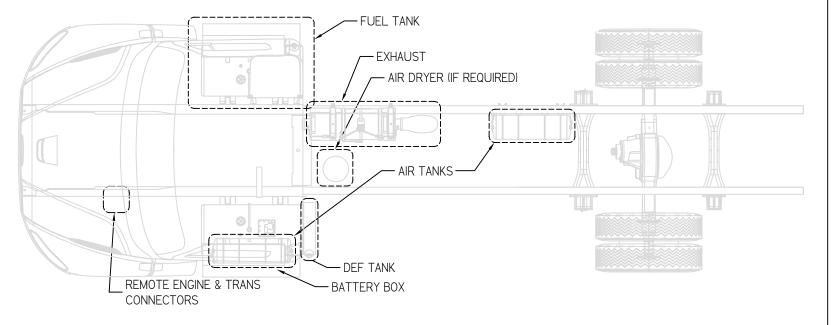

FREIGHTLINER FEATURE CODES

FUFL TANK = 206-192* OR 206-195* OR 206-034* AND 212-007* RH DEF TANK = 23U-001 LH EXHAUST = 016-101 VEHICLE INT WIRING = 353-023* TRAILER CONNECTOR (if required) = 297-001 AIR TANKS = 460-057* AIR DRYER (IF REQUIRED) = 479-003 BATTERY BOX = 290-017* & 282-001 LH* BATTERY SWITCH = 293-058* REMOTE ENG CONN. = *148-073, *163-004, *87L-003 REMOTE TRANS CONN. = 34C-001* GRAB HANDLES = 678-001* NO REAR SHOCK ABSORBERS = 439-998* PTO SWITCH = 372-035* CUSTOMER INSTALLED CHELSEA PTO = 362-035* BOOM UP ALARM = 33A-804* FOUR SWITCHES IN DASH WIRED TO BOC = 329-012* * INDICATES A REQUIRED FEATURE

IUSE THESE FOR A CHASSIS THAT REQUIRES 5 OR MORE ACCESSORY SWITCHES OR HIGH AMP OUTPUTS OR IF ANY OF THE SWITCHES REQUIRE LOGIC CONTROLED OUTPUT NOTE THAT 33A-804, 329-010, 329-012 CAN NOT BE USED WITH ANY OF THE BELOW FEATURES.

SMARTPLEX HUB MODULE - 35M-001

SMARTPLEX BOOM UP ALARM = 44V-001

SMARTPLEX BOOM UP & OUTRIGGER DEPLOYED LIGHTS AND ALARMS = 44V-002

NOTE: THE LAST 3 DIGITS OF THE SWITCH CODE ARE

SMARTPLEX LATCHING SWITCHES = 44R-XXX

THE NUMBER OF SWITCHES DESIRED

BODY STYLE = CONVENTIONAL CAB
CA OR CT DIMENSION = 192"
AFTERFRAME = 96"
FRONT AXLE RATING = 12,000 LBS.
REAR AXLE RATING = 21,000 LBS.
GVW RATING = 33,000 LBS.
FRAME = 1,800,000 RBM
FRAME THICKNESS = 11/32" MINIMUM
ENGINE = 240 HP DIESEL
TRANSMISSION = ALLISON 3500 RDS
WITH PTO PROVISION WITH 168.
'NO TRANS MOUNTED COOLER OR
RETARDER - THESE OPTIONS WILL
PROMPT A PTO UPCHARGE.

CP3 MINIMUM CHASSIS REQUIREMENTS



PETERSEN INDUSTRIES INC. 4000 S.R. 60 WEST LAKE WALES, FL. 33859-8234 TEL: (863) 676-1493 FAX: (863) 676-6844

TITLE: FREIGHTLINER CP3 CHASSIS RH FUEL TANK

| FREIGHTLINER CP3 CHASSIS RH FUEL TAINK

DRAWN BY:

PART NUMBER

APPROVED BY: DATE:

E: 12/18/19

SHEET: 1 OF 2

NΑ

DEVIATIONS FROM THIS LAYOUT COULD RESULT IN ADDITIONAL CHARGES AND/OR DELAYS IN PRODUCTION.




LOCATION OF REMOTE ENGINE CONN



LOCATION OF EXHAUST



LOCATION OF AIR DRYFR (IF REOD)

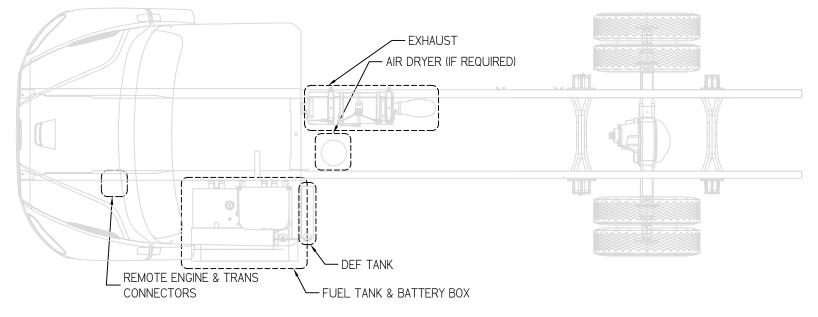

FREIGHTLINER FEATURE CODES

FUFL TANK = 204-192* OR 204-195* OR 204-034* DEF TANK = 23U-001 LH EXHAUST = 016-101 VEHICLE INT WIRING = 353-023* TRAILER CONNECTOR (if required) = 297-001 AIR TANKS = 460-057* AIR DRYER (IF REQUIRED) = 479-003 BATTERY BOX = 290-017* & 282-001 LH* BATTERY SWITCH = 293-058* REMOTE ENG CONN. = *148-073. *163-004. *87L-003 REMOTE TRANS CONN. = 34C-001* GRAB HANDLES = 678-001* NO REAR SHOCK ABSORBERS = 439-998* PTO SWITCH = 372-035* CUSTOMER INSTALLED CHELSEA PTO = 362-035* BOOM UP ALARM = 33A-804* FOUR SWITCHES IN DASH WIRED TO BOC = 329-012* * INDICATES A REQUIRED FEATURE

IUSE THESE FOR A CHASSIS THAT REQUIRES 5 or MORE ACCESSORY SWITCHES OR HIGH AMP OUTPUTS OR IF ANY OF THE SWITCHES REQUIRE LOGIC CONTROLLED OUTPUT NOTE THAT 33A-804 329-010 329-012 CAN NOT BE USED WITH ANY OF THE BELOW FEATURES. SMARTPLEX HUB MODULE - 35M-001 SMARTPLEX BOOM UP ALARM = 44V-001 SMARTPLEX BOOM UP & OUTRIGGER DEPLOYED LIGHTS AND ALARMS = 44V-002 SMARTPLEX LATCHING SWITCHES = 44R-XXX NOTE: THE LAST 3 DIGITS OF THE SWITCH CODE ARE THE NUMBER OF SWITCHES DESIRED.

CP3 MINIMUM CHASSIS REQUIREMENTS BODY STYLE = CONVENTIONAL CAB CA OR CT DIMENSION = 192" AFTERFRAME = 96" FRONT AXLE RATING = 12.000 LBS. REAR AXLE RATING = 21.000 LBS. GVW RATING = 33.000 LBS. FRAME = 1.800.000 RBM FRAME THICKNESS = 11/32" MINIMUM ENGINE = 240 HP DIESEL TRANSMISSION = ALLISON 3500 RDS WITH PTO PROVISION WITH 168 *NO TRANS MOUNTED COOLER OR RETARDER - THESE OPTIONS WILL PROMPT A PTO UPCHARGE.



PETERSEN INDUSTRIES INC. 4000 S.R. 60 WEST LAKE WALES, FL. 33859-8234 TEL: (863) 676-1493 FAX: (863) 676-6844

FREIGHTLINER CP3 CHASSIS LH FUEL TANK

PART NUMBER

DRAWN BY: JAC

APPROVED BY: DATE:

NΑ

RESULT IN ADDITIONAL CHARGES AND/OR DELAYS IN PRODUCTION.

DEVIATIONS FROM THIS LAYOUT COULD

SHEET: 12/18/19 2 OF 2